

# ACROLINK®


7N Cu INTERCONNECT & DIGITAL CABLE SERIES  
Stressfree® 99.99999% Purity Copper

## 7N-A2400 Leggenda

### INTERCONNECT CABLE RCA



### INTERCONNECT CABLE XLR

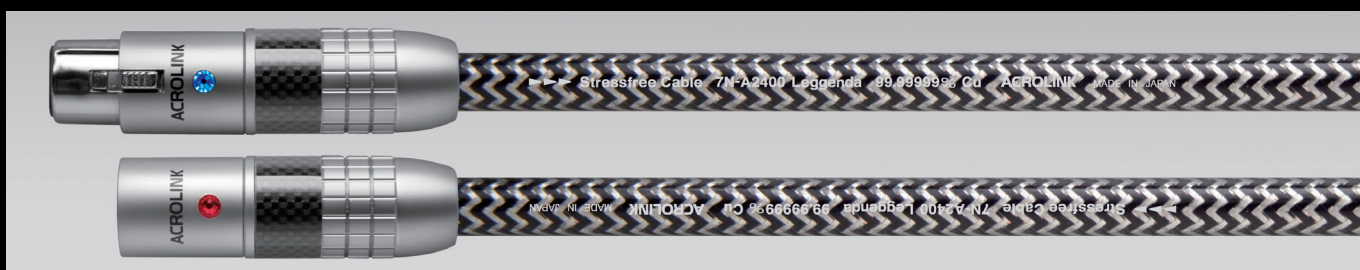

### DIGITAL CABLE AES/EBU



### Cable materials & Specifications

Conductor	: 7N Cu D.U.C.C Stressfree 0.26φ×19 strands×2 cores
Insulation	: High molecular Polyolefin resin
Inner sleeve	: High molecular Polyolefin resin with amorphous powder
Shielding	: Copper foil tape + silver plated copper wire + black UEW
Outer sleeve	: Anti UV Polyurethane
Conductor resistance	: 17mΩ/m
Electrostatic capacitance	: 69pF/m
Cable diameter	: 10.0mm


### RCA connector specifications

Center contact pin	: Hollow shaped Tellurium copper
Outer contact part	: Beryllium copper
Plating	: Rhodium
Cover	: Aluminum + Carbon fiber

### BNC connector specifications

Male contact pins	: Hollow shaped Tellurium copper
Female contact pins	: Beryllium copper
Plating for contact pins	: Rhodium
Outer body	: Brass + Carbon fiber
Impedance	: 110Ω

7N-A2400 Leggenda Cable structure

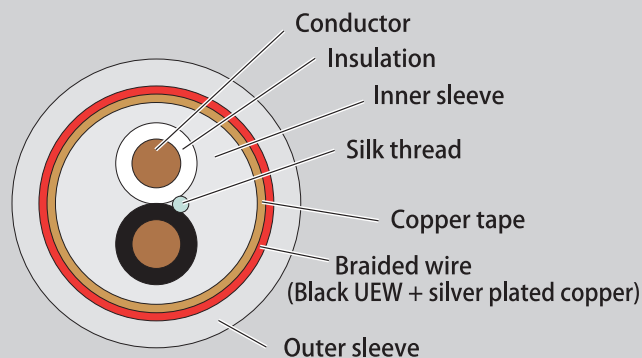

UEW stands for Urethane Enamel Wire.

Standard length of 7N-A2400 Leggenda series are 1.0m and 1.5m.

Special length order available.

- The standard, the specification, and the price of the product might change without a previous notice.
- "ACROLINK®" and "Stressfree®" are registered trademarks of Acro Japan Co., Ltd. ● "D.U.C.C.®" is a registered trademark of Mitsubishi Materials Corporation.